


# NAC2402-H2.3

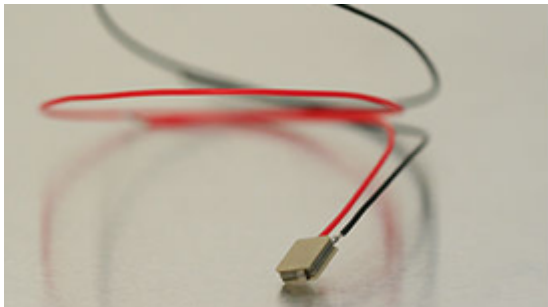


The Noliac shear stack NAC2402-H2.3 features shear motion on the X-axis. This product is ideal for stick-slip and nanopositioning applications. NAC2402-H2.3 measures 5x5 mm with a height of 2.3 mm and provides a free stroke of 3  $\mu$ m and a capacitance of 1.7 nF. End plates on top and bottom are included. The shear stack has ultra thin electrodes made of standard steel as standard.



SPECIFICATIONS

Attributes	Value	Tolerance
Chamfers	X 0.00	
Length / outer diameter	5 mm	+/-0.20 mm
Width / inner diameter	5 mm	+/-0.20 mm
Height	2.3 mm	Whichever is largest: 2% or +/-0.2 mm
Operating voltage, max.	$\pm$ 320 V	
Free stroke, from -Vmax to +Vmax	3 $\mu$ m	+/- 20%
Capacitance	1.70 nF	+/- 20%
Maximum operating temperature	150 $^{\circ}$ C	
Material	NCE51	
Unloaded resonance frequency	700.00 kHz	
Electrodes	-	
Remarks	-	

## Shear stack principle

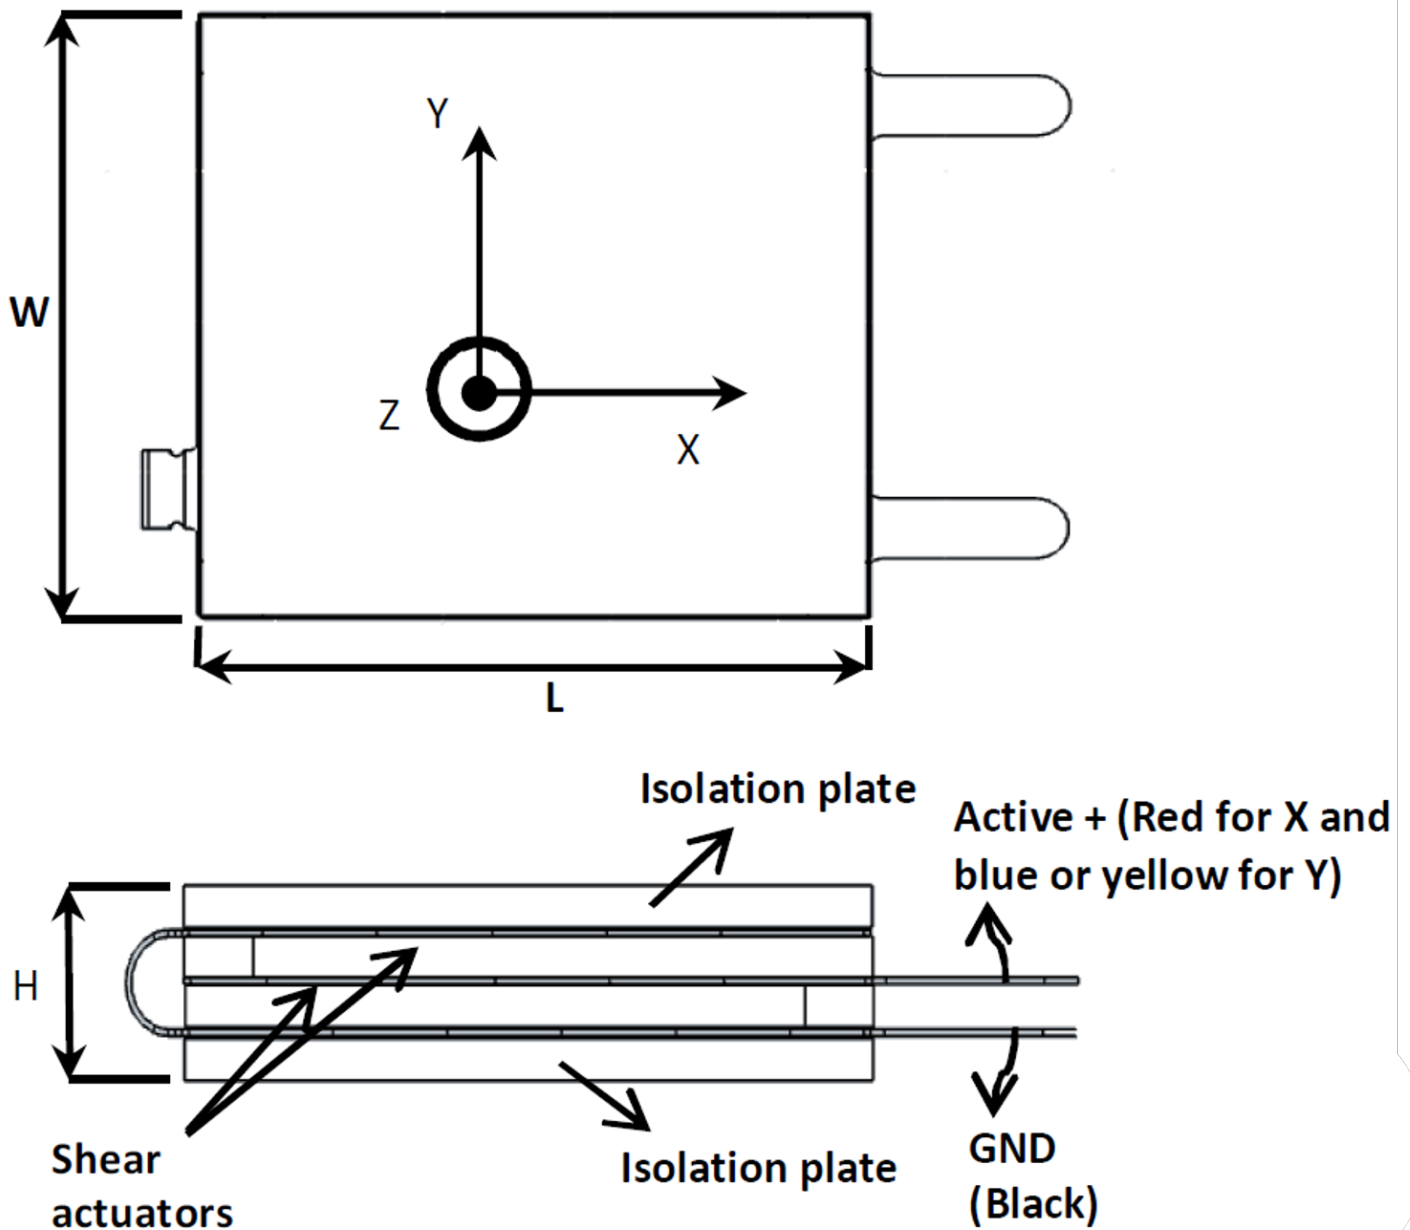

## 3D drawing

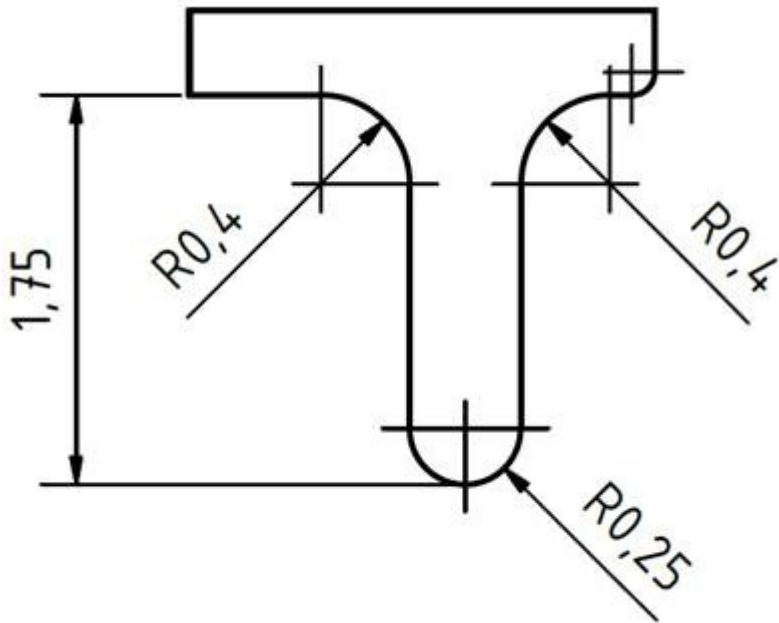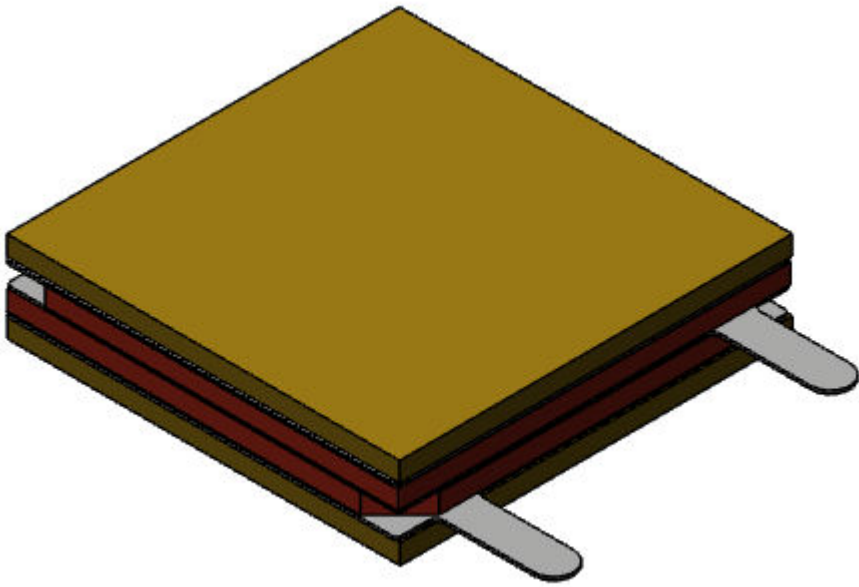

## WIRES

As standard, the shear stacks are delivered with these wires:

- BS 3G 210 TYPE A, 28 AWG (red for X-motion and blue or yellow for Y-motion).

The types and colours of the wires can be changed upon request.

Please contact us for other wiring options.

### Colour code

- Isolation plate: yellow
- Shear plate actuators X-motion: red
- Shear plate actuators Y-motion: blue
- Electrodes: grey

### End plates

As standard, the shear stacks are enclosed with 2 isolation end plates made from non-polarized piezoelectric material.

Please contact us for other options. Read more about [Noliac end plates](#).

### Electrodes

As standard, the shear stacks are delivered with with these electrodes:

- Stainless steel 1.4301

Please contact us for other electrode options.