


Ring

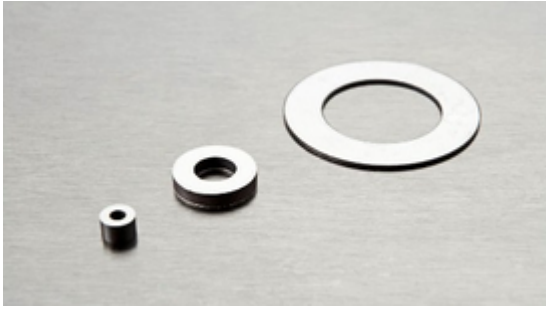

Noliac offers high quality monolayer piezo components in an extensive selection of shapes and sizes. The ring shaped piezo component is produced in a wide range of sizes with an outer diameter from 4 to 185 mm to fit your specific application. Below you can see the different possibilities available.

DIMENSIONS

OD (diagonal) (mm)	TH* (mm)											
	0.2	0.3	0.4	0.5	0.6	0.7	0.8	1	2	5	10	20
4	•	•	•	•	•	•	•	•	•	•	•	•
10	•	•	•	•	•	•	•	•	•	•	•	•
15	•	•	•	•	•	•	•	•	•	•	•	•
20		•	•	•	•	•	•	•	•	•	•	•
25		•	•	•	•	•	•	•	•	•	•	•
30			•	•	•	•	•	•	•	•	•	•
35			•	•	•	•	•	•	•	•	•	•
40			•	•	•	•	•	•	•	•	•	•
45				•	•	•	•	•	•	•	•	•
50				•	•	•	•	•	•	•	•	•
55					•	•	•	•	•	•	•	•
60					•	•	•	•	•	•	•	•
65						•	•	•	•	•	•	•
70						•	•	•	•	•	•	•
80						•	•	•	•	•	•	•
90						•	•	•	•	•	•	•
100						•	•	•	•	•	•	•
120							•	•	•	•	•	•
140								•	•	•	•	•
160								•	•	•	•	•
170								•	•	•	•	•
185									•	•	•	•

* Please note, that thickness depends on the size of the other dimensions and depends on which material is used.

ID: minimum 3 mm

Wall thickness: minimum 2 mm



We make all our piezo components on request to match specific requirements. Therefore, we do not offer the piezo components as standard products. We do have a large stock of different parts, which can be ordered for testing. This table gives an overview of the range of possibilities. Please note, that thickness depends on the size of the other dimensions as well as the material.

Contact us for further information

If you want to know more about the possibilities, please contact us using our Request for Quote form or [contact sales](#)

DRAWING

